



**"WE MAKE THE KITCHEN BETTER!"**

**ATOSA USA, INC.**

**Toll Free: 855-855-0399 Email: [info@atosausa.com](mailto:info@atosausa.com)**

[www.atosa.com](http://www.atosa.com) | [www.atosausa.com](http://www.atosausa.com)

California, Colorado, Florida, Georgia, Illinois,  
New Jersey, Ohio, Texas, Washington

# Countertop Glass Door Merchandisers

## Standard Features

- Black exterior cabinet with black door frame and white interior
- Environmentally friendly R600a refrigerant
- Foamed-in-place high density polyurethane insulation
- Double pane glass door with recessed door handle
- Door lock standard
- Electronic Temperature Controller
- Pre-installed removable PVC coated wire shelves standard
- Certified for packaged foods and bottled beverages
- Maintains temperatures between 35°F – 38°F
- Magnetic door gasket standard for positive door seal
- LED interior lighting
- Leveling legs
- 5' cord with NEMA 5-15 plug standard

**Note:** CTD-3T and CTD-3ST models feature a 1-year parts and labor warranty and do not qualify for the 3-year parts and labor warranty.

For the best results of food preservation we recommend setting your refrigerator between 35°F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

## MODELS:

CTD-3T / CTD-3ST / CTD-5T / CTD-7T



**CTD-3T**



**CTD-3ST**



**CTD-5T**



**CTD-7T**



3 YEAR PARTS AND LABOR WARRANTY  
5 YEAR COMPRESSOR PART WARRANTY



REV. 08/26



**"WE MAKE THE KITCHEN BETTER!"**

**ATOSA USA, INC.**

**Toll Free: 855-855-0399 Email: [info@atosausa.com](mailto:info@atosausa.com)**

[www.atosa.com](http://www.atosa.com) | [www.atosausa.com](http://www.atosausa.com)


California, Colorado, Florida, Georgia, Illinois,  
New Jersey, Ohio, Texas, Washington

## SPECIFICATIONS


| Models  | Door | Capacity (Cu.Ft.) | Shelves | Amps(A) | Voltage (V/Hz/Ph) | HP   | Refrigerant | Exterior Dimensions (inch)                              | Interior Dimensions (inch)                              | Net Weight (lb) | Gross Weight (lb) |
|---------|------|-------------------|---------|---------|-------------------|------|-------------|---------------------------------------------------------|---------------------------------------------------------|-----------------|-------------------|
| CTD-3T  | 1    | 2.4               | 2       | 0.65    | 115/60/1          | 1/10 | R600a       | 17 <sup>1/4</sup> ×19 <sup>3/4</sup> ×27 <sup>1/2</sup> | 14 <sup>3/8</sup> ×15×23                                | 52              | 57                |
| CTD-3ST | 1    | 2.4               | 2       | 1.0     | 115/60/1          | 1/8  | R600a       | 18 <sup>1/8</sup> ×18 <sup>1/2</sup> ×33                | 14 <sup>1/2</sup> ×13×22                                | 64              | 70                |
| CTD-5T  | 1    | 4.6               | 3       | 1.5     | 115/60/1          | 1/8  | R600a       | 21 <sup>1/4</sup> ×22×33 <sup>3/4</sup>                 | 18×17×29                                                | 88              | 95                |
| CTD-7T  | 1    | 7.0               | 3       | 1.3     | 115/60/1          | 1/8  | R600a       | 21 <sup>1/2</sup> ×24×38                                | 20 <sup>1/4</sup> ×18 <sup>1/4</sup> ×31 <sup>5/8</sup> | 101             | 113               |

## PLAN VIEW


**CTD-3T**

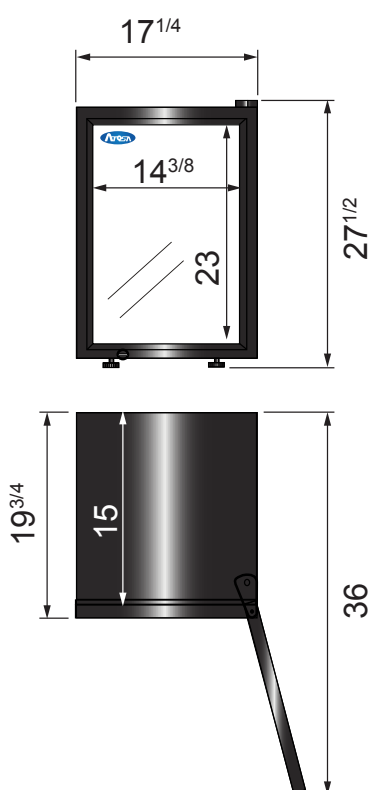

**CTD-3ST**

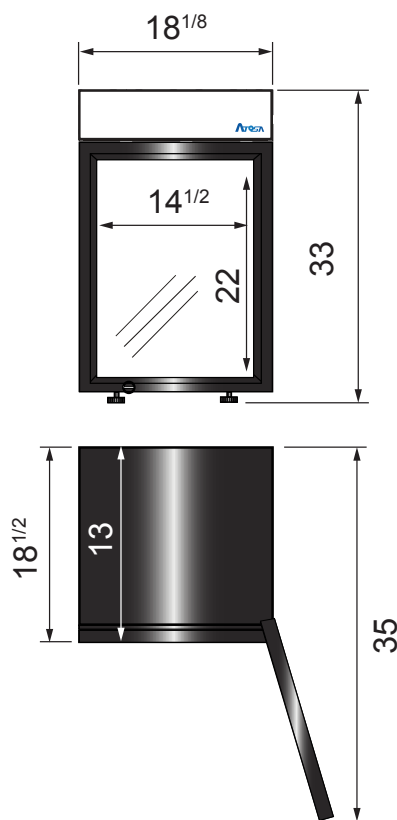


**CTD-5T**

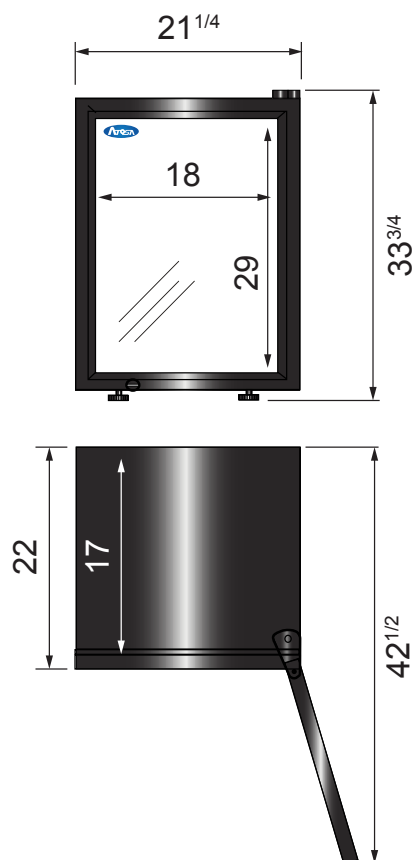

Door lock

LED lights

Epoxy shelves

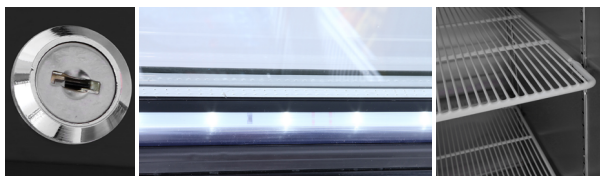

**NEMA 5-15P**



NEMA  
15A/125V