ATOSA USA, INC.
Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

"WE MAKE THE KITCHEN BETTER!"

Top Mount 1/2 Door Reach-In Freezers

MODELS:

MBF8007GR / MBF8007GRL / MBF8008GR

Standard Features

- Top mount compressor with environmentally friendly R290 refrigerant
- Stainless steel exterior & interior
- Electronic temperature controller
- Maintains temperatures between -8°F – 0°F
- LED interior light(s)
- Recessed door handle(s)
- Door lock(s) standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- Three (3) pre-installed shelves per section
- Down duct refrigeration to ensure even distribution of air

Optional Accessories

- Extra shelves – includes 4 shelf clips per shelf, shelf part #: W0402389

MBF8007GR

MBF8007GRL

MBF8008GR

For the best results of food preservation we recommend setting your freezer between -8°F to 0°F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

3 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY

REV. 07/26

ATOSA USA, INC.
Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

"WE MAKE THE KITCHEN BETTER!"

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
MBF8007GR	2	21.4	3	4	6.3	115/60/1	1/2	R290	$28^{3/4}\times31^{3/4}\times81^{1/4}$	254	287
MBF8007GRL	2	21.4	3	4	6.3	115/60/1	1/2	R290	$28^{3/4}\times31^{3/4}\times81^{1/4}$	254	287
MBF8008GR	4	43.2	6	4	8.6	115/60/1	3/4	R290	$51^{3/4}\times31^{3/4}\times81^{1/4}$	353	403

PLAN VIEW

MBF8007GR

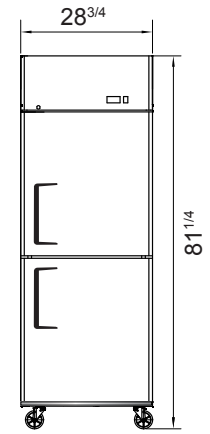

MBF8007GRL

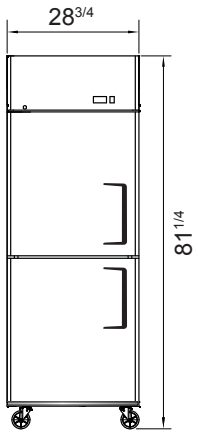

MBF8008GR

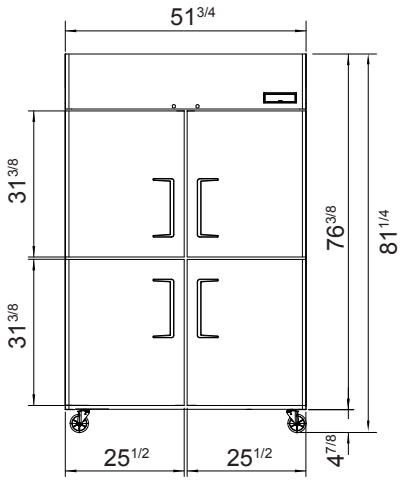

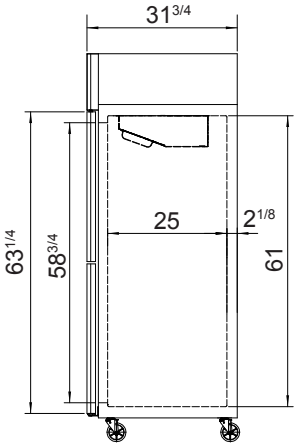

*Interior Dimensions





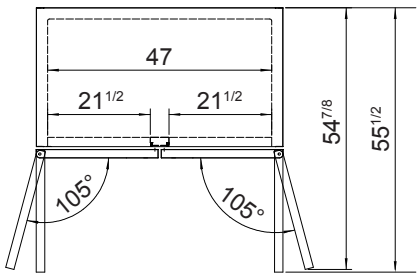

SELF-CLOSING
AND STAY OPEN
DOOR FEATURE

Casters | Epoxy shelves | Door lock | Down duct | Temperature control